



# **INSTRUCTION MANUAL YC-500**

**YAESU MUSEN CO., LTD.**

TOKYO JAPAN

# FREQUENCY COUNTER YC-500



## GENERAL DESCRIPTION

The YAESU model YC-500 is a precisely built frequency counter. It is a light weight, completely self-contained frequency measuring instrument of compact design using advanced integrated circuit techniques to enable counting of a wide frequency range, 10 Hz to 500 MHz.

The dual range system provides eight digit measurement with MHz or kHz indication.

The YC-500 series consists of three models depending upon the measurement accuracy—YC-500J for 0.001%, YC-500S for 0.0001%, and YC-500E for 0.000002%.

# SPECIFICATIONS

## Frequency Range:

Input A – 10 Hz to 50 MHz  
Input B – 50 MHz to 500 MHz

## Accuracy:

YC-500J model – 10 ppm  
YC-500S model – 1 ppm  
YC-500E model – 0.02 ppm

## Display Digit:

6 digits

## Display Time:

0.1 or 2 seconds

## Counting Time:

0.001 or 1 second

## Input Voltage:

Input A – 25 mV to 20V r.m.s. (HIGH)  
          25 mV to 2V r.m.s. (LOW)  
Input B – 100 mV to 2V r.m.s.

## Input Impedance:

Input A – HIGH 1 Meg ohm, LOW 50 ohms  
Input B – 50 ohms

## Input Capacitance:

Input A – Less than 20 PF  
Input B – Less than 25 PF

## Operating Temperature:

0 to 40° C

## Power Requirement:

AC – 100/110/117/200/220 or 234V,  
50/60 Hz  
DC – 12 to 14.5V

## Size:

220 W x 80 H x 235 D m/m

## Weight:

approximately 3.2 kg

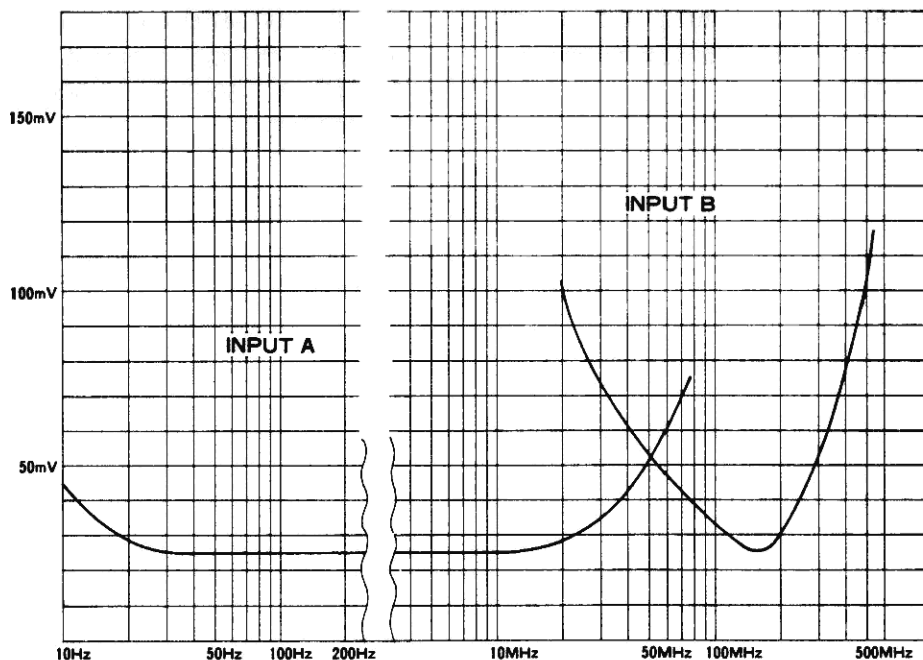


Figure 1 Characteristic of Frequency Response

# CONTROLS AND SWITCHES

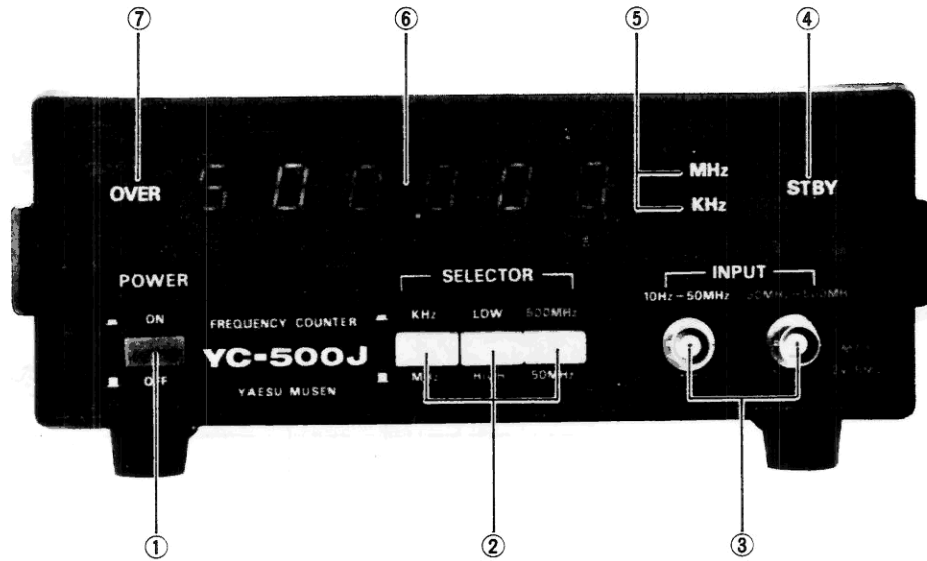


Figure 2 FRONT PANEL

## (1) POWER "ON/OFF" SWITCH

The POWER switch turns the frequency counter "ON" and "OFF" for both AC and DC operations. With the switch pushed in position, the power is supplied to all circuits for both AC or DC operation. The crystal oscillator is connected to the supply when the power cord is connected to the power outlet or battery regardless of the POWER switch position and STBY lamp light-up. When it is not in use for long periods, the power cord should be disconnected from the power source.

## (2) SELECTOR SWITCHES

### MHz/kHz

When the range switch is pushed in, a kHz indicator lights up and the digits to the decimal point are kHz. In the switch out position, a MHz indicator lights up and the digits to the decimal point are MHz.

### HIGH/LOW

This switch selects input impedance of "A" input. With the switch pushed in, the input impedance is 50 ohms and with the switch in outer position, the input impedance is 1M ohm. Input impedance of input "B" is 50 ohms regardless of the switch position.

### 50 MHz/500 MHz

This switch selects the signal range of either 50 MHz or 500 MHz. With the switch pushed in, the frequency range is 50 MHz to 500 MHz and when the switch is in the outer position, the range is 10 Hz to 50 MHz.

## (3) INPUT

Input "A" is used for the measurement up to 50 MHz and input "B" is used for the 50 - 500 MHz range. The input impedance of input "A" is selected to either 1M ohm or 50 ohms by the SELECT switch. The maximum input voltage to input "A" is 20V r.m.s. for high impedance or 2V r.m.s. for low impedance. Input "B" has 2V r.m.s. maximum input voltage.

## (4) STBY

The crystal oscillator circuit is connected to the power when the power cord is connected to the power source and the STBY lamp lights up.

## (5) OVER

This is an OVER range indicator lamp which will flash on when the input frequency is higher than the display frequency.

# REAR PANEL CONNECTIONS

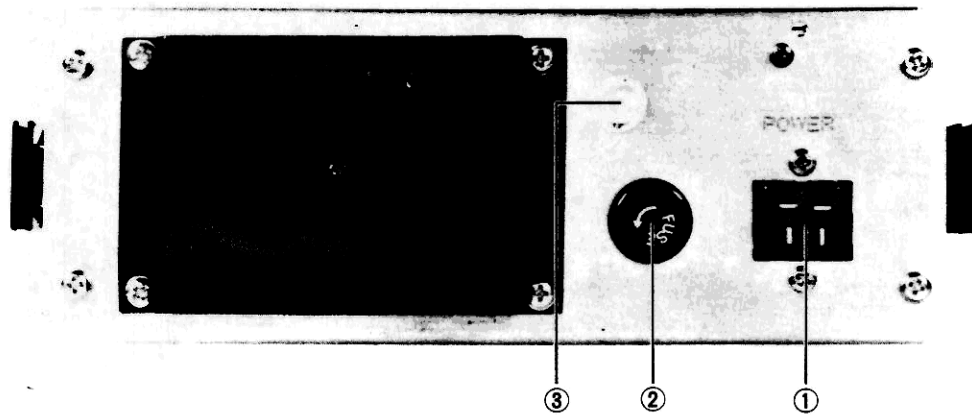


Figure 3 Rear Panel

**(1) POWER**

This socket accepts the plug on either AC or DC cord

**(2) FUSE**

Fuse holder for AC operation

**(3) 1 MHz OUTPUT**

The output terminal of an internal 1 MHz clock oscillator signal

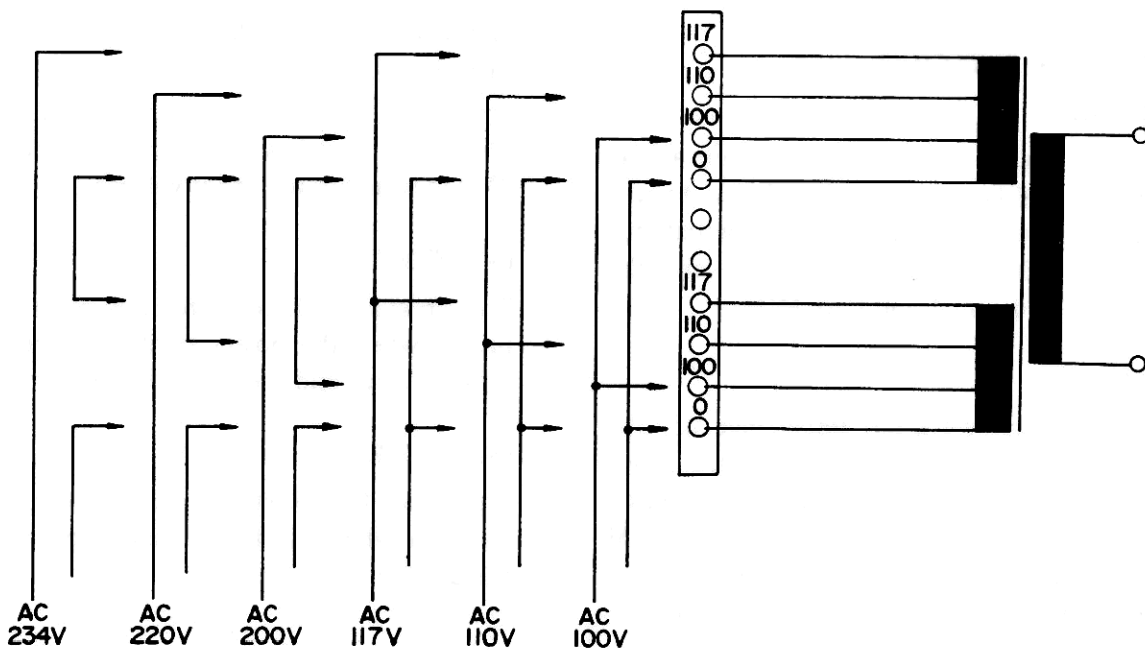


Figure 4 Transformer Primary Wiring

# OPERATION

## CAUTION

PERMANENT DAMAGE WILL RESULT IF IMPROPER AC OR DC SUPPLY VOLTAGE IS APPLIED TO THE COUNTER.

THE FOLLOWING PRECAUTIONS ARE NECESSARY WHEN USING THIS FREQUENCY COUNTER.

- (1) Supply voltage should be within  $\pm 10\%$ .
- (2) Prior to connecting the power cord, the power switch should be in "OFF" position to avoid being damaged due to transient voltage which may be caused by the connection of cord.
- (3) For DC operation, the red cable should be connected to (+) plus terminal and the black cord to (-) minus terminal of battery. A fuse will blow if connection is reversed.
- (4) When the power cord is connected to the power source, the clock oscillator circuit is working, even with the POWER switch "OFF". Therefore, it is recommended that the power cord is disconnected from the supply source when the counter is not being used for a long period of time.
- (5) In order to get accurate frequency measurement, it is recommended that you allow the counter to warm up for at least one hour.
- (6) It is recommended that the counter be used at an ambient temperature of  $0^{\circ}\text{C}$  to  $40^{\circ}\text{C}$ .
- (7) Avoid any shocks to the counter and handle it carefully.
- (8) Attention should be paid in regard to the wave form of the input signal. A distorted signal may cause erratic measurement.
- (9) The input voltage should not exceed 20V r.m.s. at input "A" and 2V r.m.s. at input "B".

## OPERATION

### PREPARATION

Set the power switch to "OFF" position. Connect an appropriate cord (AC or DC cord) to the power receptacle on rear panel. The STBY lamp lights up showing the clock oscillator is working. It is recommended to allow one hour warm-up prior to measurement for accurate measurement. However, it is not necessary to wait for one hour for normal measurement.

Connect measuring cable to one of the inputs, "A" or "B". Input "A" is used for measurement of frequencies below 50 MHz and input "B" is used for frequencies higher than 50 MHz.

Push the POWER switch to "ON" position. Connect the other end of the measuring cable to the measuring point; black clip is for ground.

### FREQUENCY MEASUREMENT

#### Below 50 MHz:

Use input "A" and set the range switch to outer position. The YC-500 has six numerical displays, however, it is possible to read to eight digit accuracy.

For example, if the range is set to MHz and display shows 12.346 MHz, the actual frequency is between 12.345 MHz and 12.346 MHz. When the range switch is set to kHz, then the following three digits can be read. It may now shows 345.678 kHz and the actual frequency is 12,345.678 kHz. However, the last digit is either 7 or 8 as the counter always shows a one count discrepancy as illustrated in Fig. 5.

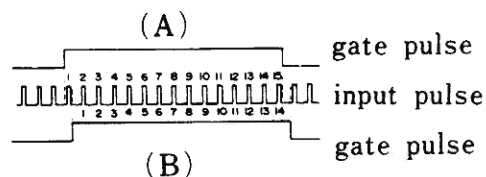


Figure 5

The over range lamp will flash if the input frequency is higher than the frequency displayed. No damage will result if the counter is operated continuously under over range conditions. The lamp merely indicates that the true frequency is not being displayed and may lack upper portion of digits.

The input impedance of input "A" can be selected by the switch on front panel to either 50 ohms or 1M ohm to minimize the effect of the counter on the circuit measured. The 1M ohm position may be used to minimize the loading on the circuit and 50 ohms may be used to minimize a stray pick-up from other signal sources.

#### Over 50 MHz:

Use input "B" and set the range switch to the push down position. Read frequency as described for frequency below 50 MHz. The impedance of input "B" is 50 ohms and cannot be changed by the HIGH/LOW switch.

NOTE: If the signal to be measured has some harmonic content, then, depending on the input level, the counter may show fundamental or harmonic frequency.

#### ACCURACY OF COUNTER

When measuring frequency with a frequency counter, there are always errors inherent in the system which cannot be avoided.

These errors are:

- (1) Standard clock oscillator error.
- (2) Counting error associated with input gate.

The first error results when the frequency of the clock oscillator crystal changes due to temperature or aging. If the crystal frequency increases by 1%, the gate time is reduced by 1% which causes a -1% error in indicated frequency.

The YC-500 series consists of three models the difference being the accuracy of the clock oscillator:

YC-500J - 0.001%  
YC-500S - 0.0001%  
YC-500E - 0.000002%

In the YC-500E the crystal accuracy is 0.000002% which represents a maximum error of 1 Hz at 50 MHz.

The second error is always present in any frequency counter and is called a one count error. This error results when the gate opens just before a pulse or just after a pulse and causes an error of +1.

The counter counts the number of pulses that pass through the gate. If the gate opens as in the top drawing (A) in Fig. 1, the counter will count 15 pulses. If it opens as in the bottom drawing (B), it will count 14 pulses although the frequency is the same for both cases.

This error occurs for the last digit only. Hence, on the YC-500 the error is 1 Hz on the kHz range and 1 kHz on the MHz range.

This error must be considered when measured frequency occupies only the first two digits on either range.

# CIRCUIT DESCRIPTION

The signal from input "A" (10 Hz – 50 MHz) is amplified by Q<sub>401</sub>, 2SK19GR and fed through a diode switch, D<sub>407</sub> and D<sub>408</sub>, 1N60FM to a Schmitt trigger where the input signal is converted into a square wave of constant amplitude regardless of wave form of input signal.

The signal from input "B" (50 MHz – 500 MHz) is fed to the pre-scaler Q<sub>402</sub>, SP-631B where the signal is divided by ten. The divided output is then fed through a diode switch, D<sub>407</sub> and D<sub>408</sub>, 1N60FM to the Schmitt trigger circuit.

The diode D<sub>401</sub> through D<sub>404</sub> clips the signal when the excessive amplitude signal is applied to the input terminal.

Q<sub>404</sub>, MPS-3640 sets the output level of Q<sub>403</sub> to match the operating level of TTL integrated circuit. The pulse width is set by TC<sub>401</sub>.

The output from Q<sub>404</sub> is then fed to the gate circuit composed of Unit 1 of Q<sub>211</sub>, SN74S11N which passes the pulses while the gate opens and the pulses are sent to Q<sub>208</sub>, SN74196N.

Unit 3 of Q<sub>211</sub> is used as a second gate and Unit 2 is used to stretch the pulse width for stable counting of Q<sub>205</sub>, SN74143N.

The pulse passed through the first gate is fed to the last digit counter Q<sub>208</sub>, SN74196N which counts the number of pulses passing through the gate. The BCD code output from Q<sub>208</sub> is fed to a 4-bit latch memory IC, Q<sub>207</sub>, SN7475N which stores the binary information between counting unit and indicator unit.

The latch memory is required to prevent the numeric indicators from following each count

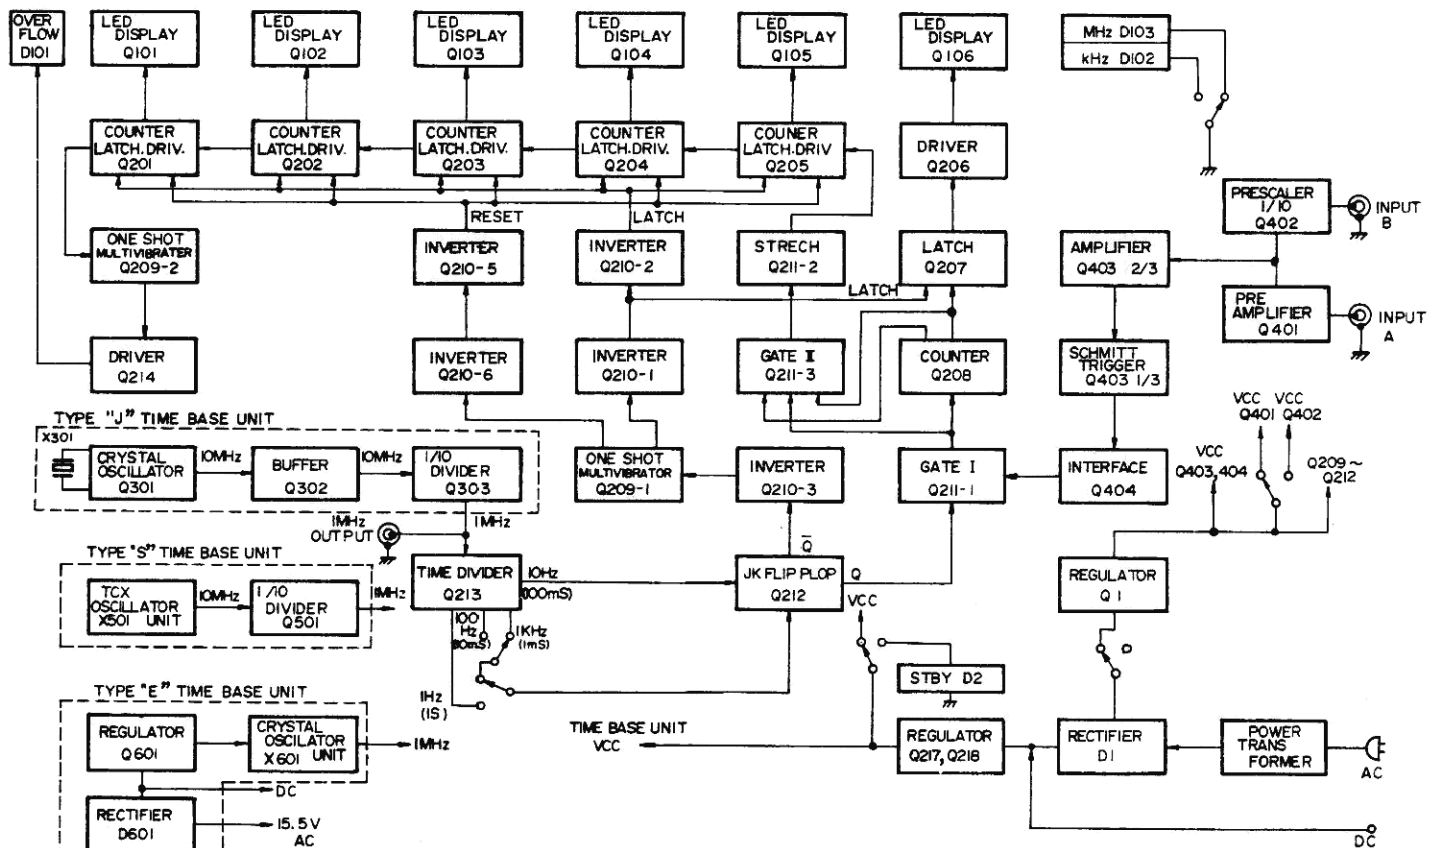


Figure 6 YC-500 series  
BLOCK DIAGRAM



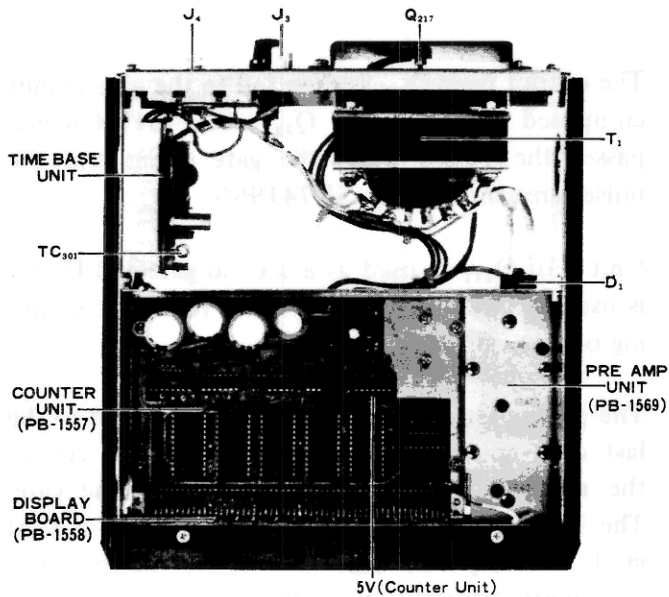


Figure 7 Top View

when the gate opens. The result is that the frequency measured in one count is held in the indicators while the next count is being made, then they change when the count is completed.

The binary coded output from  $Q_{207}$  is fed to  $Q_{206}$ , SN74247N where the binary coded signal is converted into decimal numbers to be displayed by the indicator  $Q_{106}$ , 5082-7750.

The QA and QD components of the binary coded output from  $Q_{208}$  pass through the second gate and are fed to  $Q_{205}$ , SN74143N where the binary coded signal is converted to be displayed by  $Q_{105}$ .  $Q_{205}$  functions as a counter, latch and decoder.

When the counter, latch and decoder IC,  $Q_{205}$ ,  $Q_{204}$ ,  $Q_{203}$ ,  $Q_{202}$  and  $Q_{201}$  count to 10, they produce a pulse to be fed to upper counter. If the number of pulses passing through the gate is greater than the counting capacity of  $Q_{201}$ , the overflow from  $Q_{201}$  is fed to the one-shot multivibrator  $Q_{209}$ , SN74123N producing an overflow indicator signal which is fed through lamp driver  $Q_{214}$ , 2SC735Y to the over range lamp  $D_{101}$ , SL103.

The clock oscillator circuit is composed of 10 MHz crystal oscillator  $Q_{301}$ , 2SC828Q and a buffer amplifier  $Q_{302}$ , 2SC828Q. The divider  $Q_{303}$ , SN7490N divides the 10 MHz signal by 10 producing a 1 MHz clock signal.

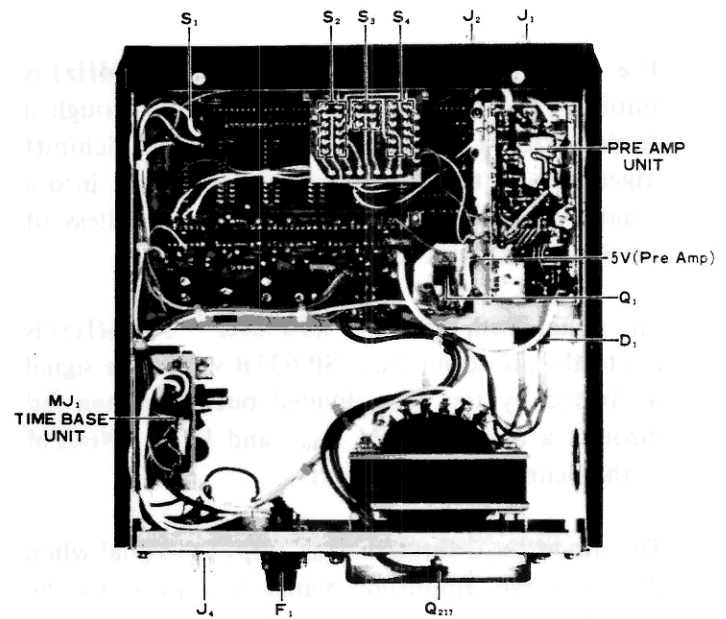


Figure 8 Bottom View

The 1 MHz signal is fed to divider  $Q_{213}$ , MSM5592 which produces 1 kHz, 100 Hz, 10 Hz and 1 Hz signals.

The 10 Hz signal is fed to "J" input (Pin 5) and the others are fed to clock input (Pin 12) for range selection.

$Q_{209}$ , SN74123N and  $Q_{210}$ , SN7404N are used to produce reset and set pulses.

On AC operation, the transformer secondary voltage 8.7 Volts AC is rectified by a bridge connected rectifier  $D_1$ , S4VB-10 and then regulated by  $Q_{217}$ , MJE700 and  $Q_{218}$ , F78L05 to supply 5V to ICs. The 5V regulated supply is directly connected to clock oscillator. With the POWER switch "ON", +5V is fed to the counter unit. A part of rectified DC voltage is fed through the power switch to the regulator,  $Q_1$ ,  $\mu$ PC14305 which supplies regulated 5V to the preamplifier unit.

In the "E" model, the AC 15.5 Volt supply is rectified by  $D_{601}$ , S1RBA and regulated by  $Q_{603}$ ,  $\mu$ PC14312 to 12 Volts which is used for the heat chamber and crystal oscillator circuit.

In DC operation, the 12V DC supply is connected through  $R_1$  to the output of  $D_1$ .

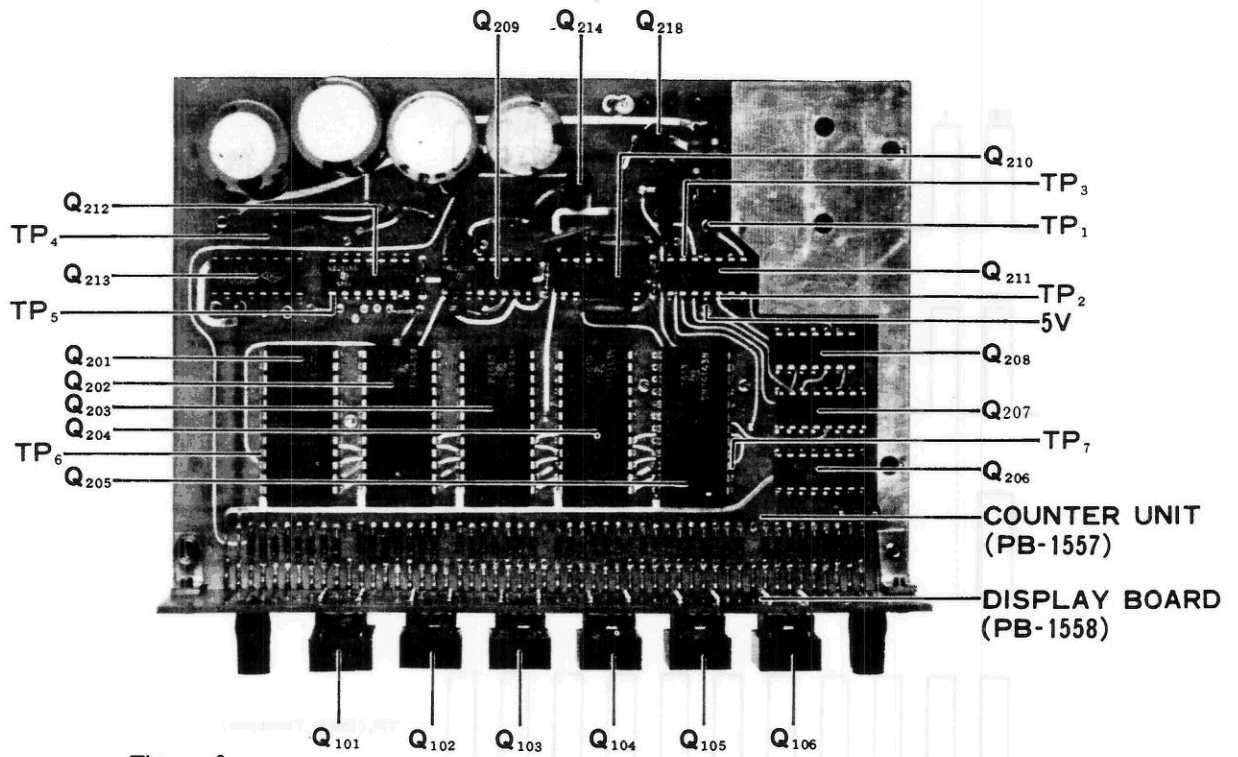


Figure 9

COUNTER-DISPLAY UNIT

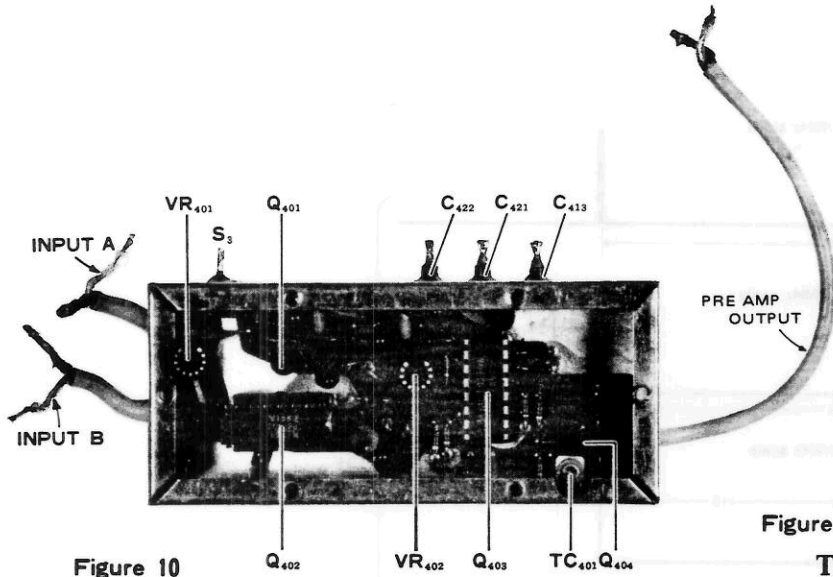


Figure 10

PRE AMP UNIT (PB-1569)

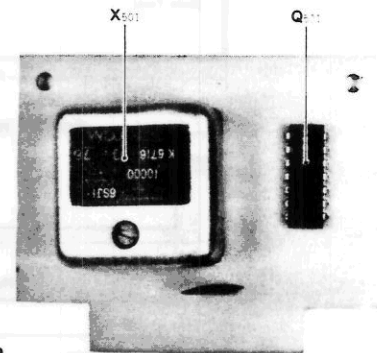


Figure 12

TIME BASE UNIT "S" (PB-1562)


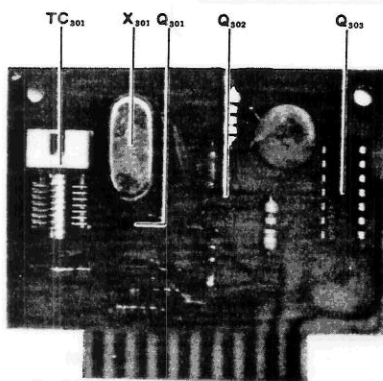


Figure 11

TIME BASE UNIT "J" (PB-1561)

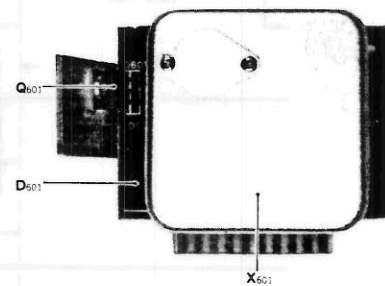

TIME BASE UNIT "E" (PB-1563)


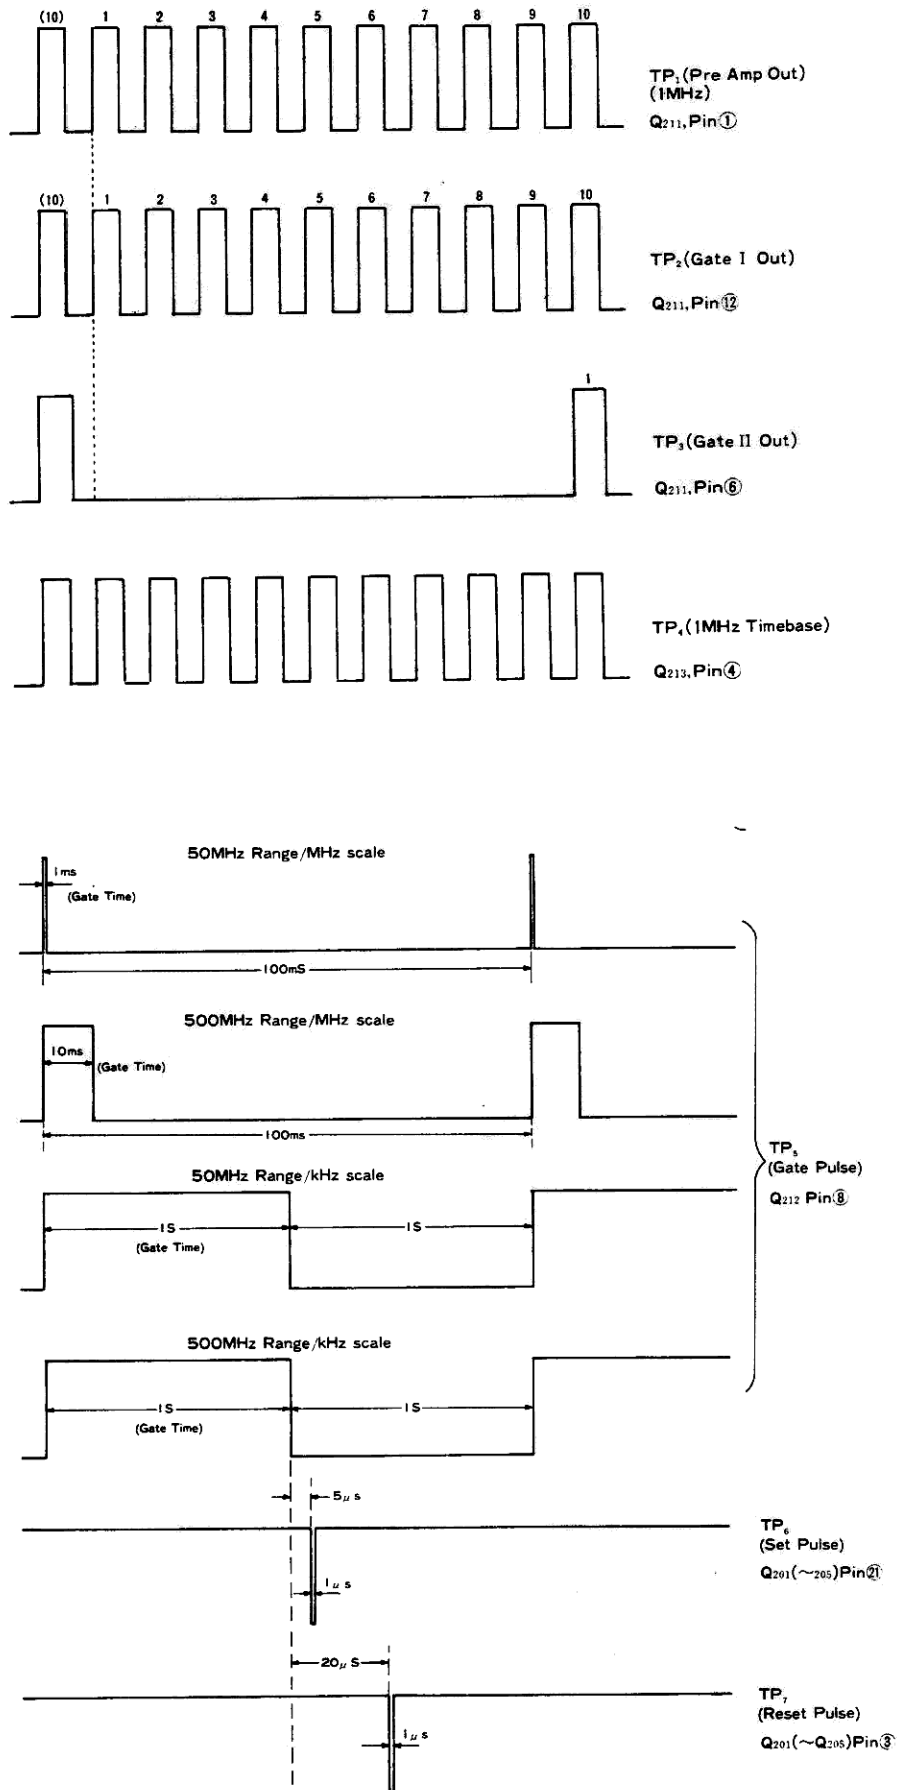


Figure 12 Waveforms

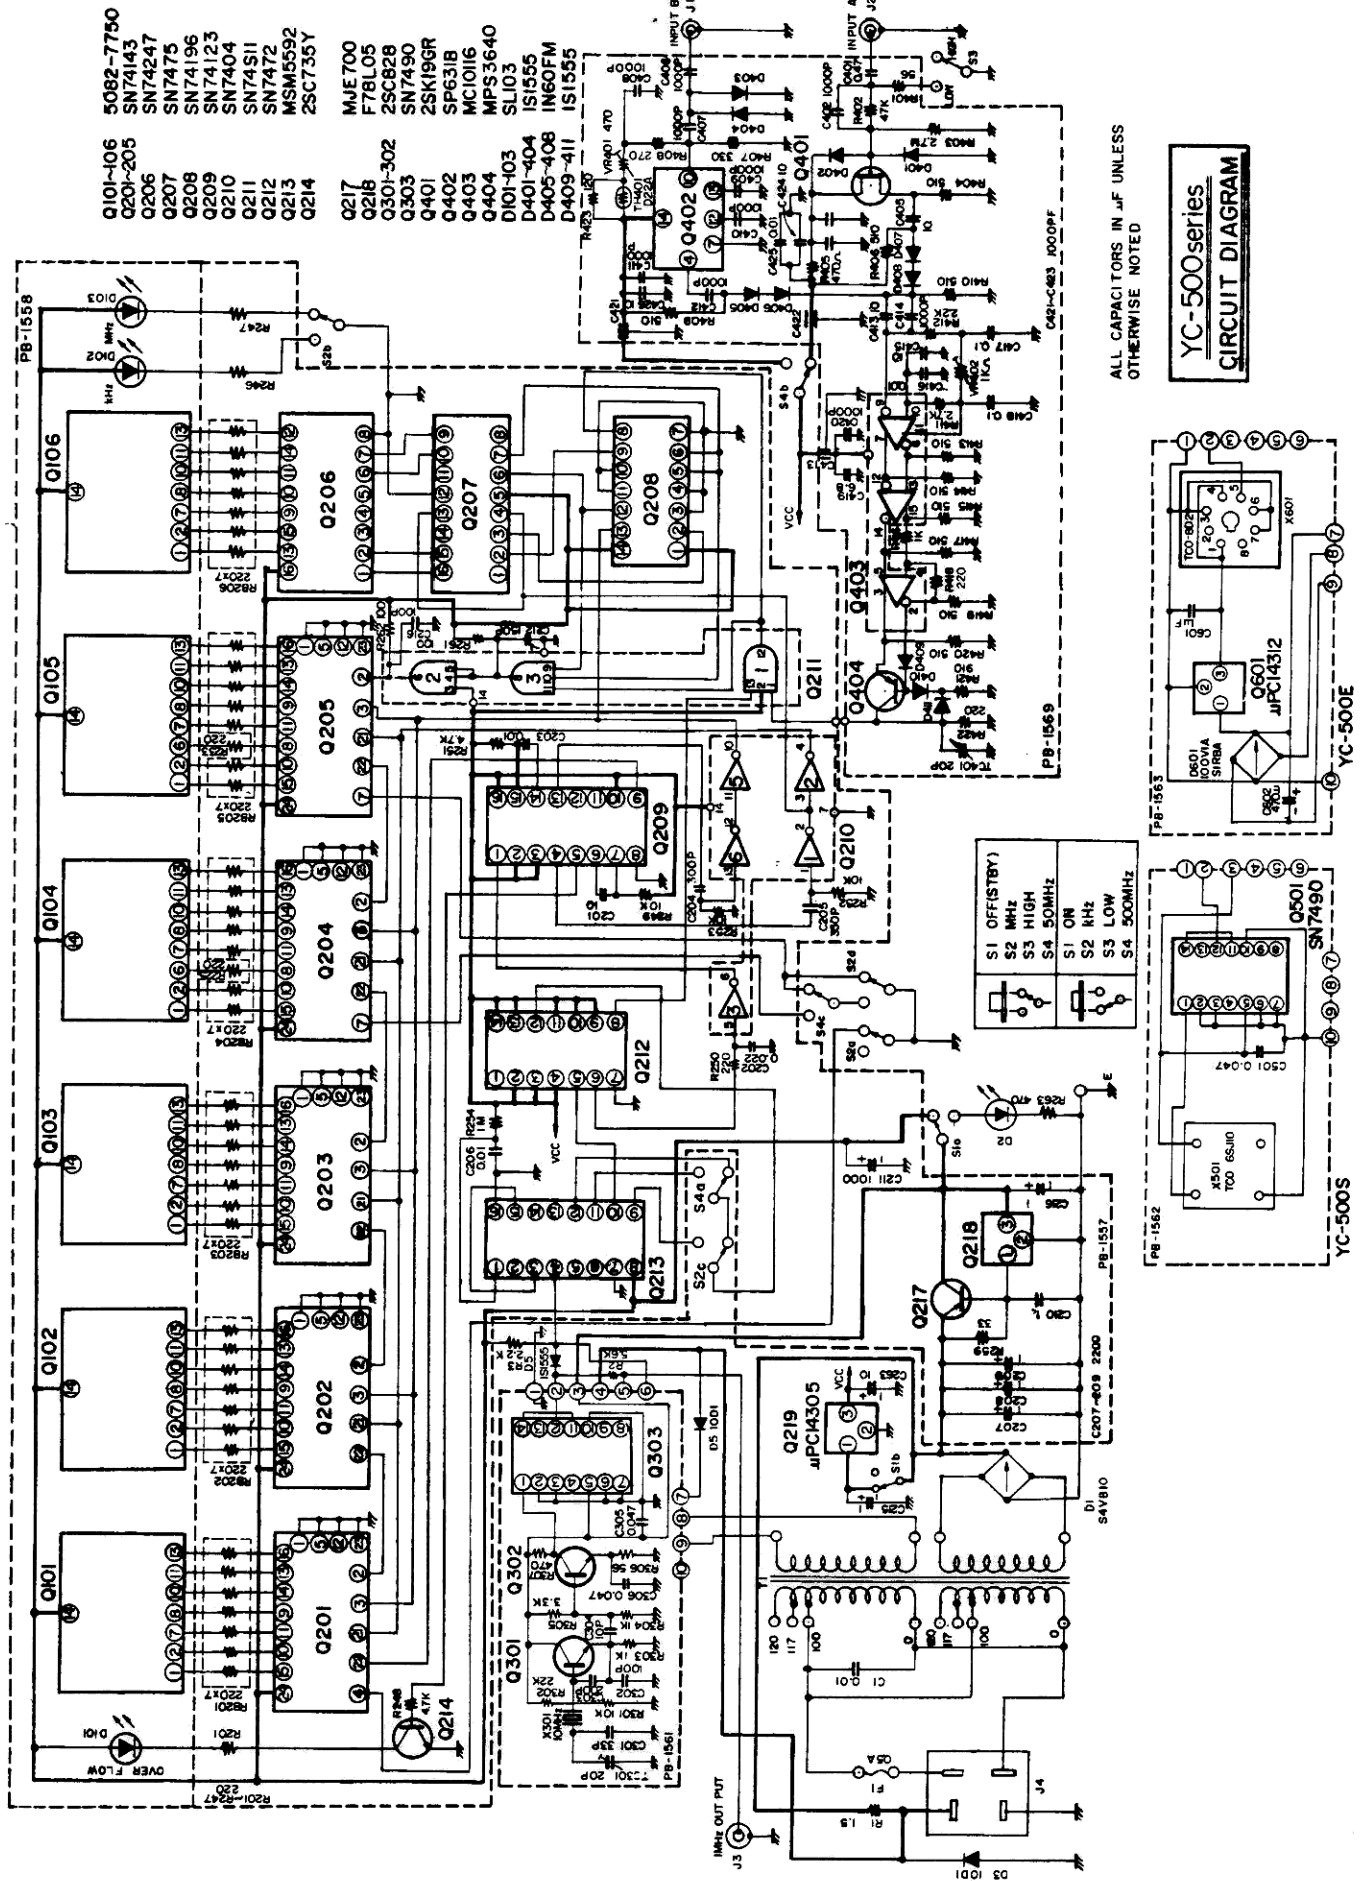

ALL CAPACITORS IN  $\mu$ F UNLESS OTHERWISE NOTED

**YC-500 series  
CIRCUIT DIAGRAM**

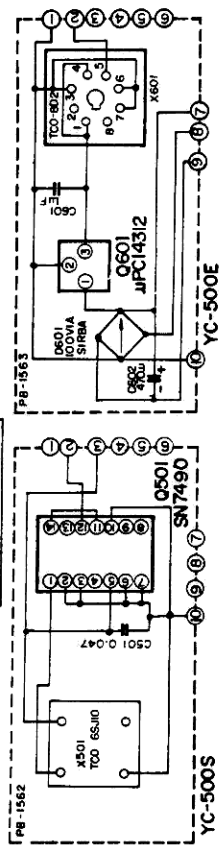


Figure 13

				COUNTER UNIT		
				PB PRINTED CIRCUIT BOARD		
D	DIODE			1557(A~Z)		
1	Si Bridge	S4VB10				
3.4	Si	10D1	Q	IC & TRANSISTOR		
5	Si	1S1555	210	IC	SN7404N	
2	LED	SL103	211	IC	SN74S11N	
			212	IC	SN7472N	
R	RESISTOR		207	IC	SN7475N	
	CARBON FILM		209	IC	SN74123N	
3	$\frac{1}{8}W$	2.2K $\Omega$	201~205	IC	SN74143N	
2	$\frac{1}{8}W$	5.6K $\Omega$	208	IC	SN74196N	
			206	IC	SN74247N	
	WIRE WOUND (CEMENT)		213	IC	MSM5592	
1	10W	1.5 $\Omega$	218	IC	F78L05AC	
			219	IC	$\mu$ PC14305	
C	CAPACITOR		214	Tr	2SC735Y	
	CERAMIC DISC		217	Tr	MJE700	
1	1.4KV	0.01 $\mu$ F				
			R	RESISTOR		
				CARBON COMPOSITION		
			261, 262	$\frac{1}{8}W$	91 $\Omega$	
T	POWER TRANSFORMER		201, 225, 233, 246, 247, 250	$\frac{1}{8}W$	220 $\Omega$	
1	52-49		263	$\frac{1}{8}W$	470 $\Omega$	
			247, 251	$\frac{1}{8}W$	4.7K $\Omega$	
S	SWITCH		249, 252, 253	$\frac{1}{8}W$	10K $\Omega$	
1		MPS-U	254	$\frac{1}{8}W$	1M $\Omega$	
2, 4		3FS-40	259	$\frac{1}{2}W$	33 $\Omega$	
3		3FS-20-15	RB	BLOCK RESISTOR		
			201~206	$\frac{1}{8}W$	220 $\Omega$ $\times$ 7	
PB-1570	SWITCH BOARD (S2~S4)		C	CAPACITOR		
				DIPPED MICA		
J	RECEPTACLE		215	50WV	150PF	
1, 2, 3		UG 625B/O	204	50WV	300PF	
4		1B4E	205	50WV	350PF	
				CERAMIC DISC		
MJ	MULTI JACK		212	50WV	150PF	
1	3305-010-011	10P	206	50WV	0.01 $\mu$ F	
				CERAMIC CHIP		
F	FUSE		213	25WV	0.01 $\mu$ F	
1		0.5A(AC)		MYLAR		
			203	50WV	0.01 $\mu$ F	
FH	FUSE HOLDER		202	50WV	0.022 $\mu$ F	
1		F-7152		TANTALUM		
			201	16WV	10 $\mu$ F	
				ELECTROLYTIC		
			210, 214, 215	16WV	1 $\mu$ F	
	DISPLAY BOARD		217	16WV	10 $\mu$ F	
PB	PRINTED CIRCUIT BOARD		211	16WV	1000 $\mu$ F	
	1558(A~Z)		207~209	16WV	2200 $\mu$ F	
			QS	IC SOCKET		
Q	DISPLAY LED		201		314-AG37D	
101~106		5082-7750		PREAMP UNIT		
				PB PRINTED CIRCUIT BOARD		
D	DIODE		1569(A~Z)			
101~103	LED	SL-103				
			Q	IC, FET & TRANSISTOR		
QS	LED SOCKET		402	IC	SP631B	

401	FET	2SK19GR							
404	Tr.	MPS3640	306		1/4W			56 Ω	
			307		1/4W			470 Ω	
<b>D</b>	<b>DIODE</b>		303, 304		1/4W			1K Ω	
405~408	Ge	1N60FM	305		1/4W			3.3K Ω	
401~404, 409~411	Si	1S1555	301		1/4W			10K Ω	
<b>R</b>	<b>RESISTOR</b>		302		1/4W			22K Ω	
	<b>CARBON COMPOSITION</b>								
401		1/8W	56 Ω	<b>C</b>	<b>CAPACITOR</b>				
422		1/8W	110 Ω		<b>DIPPED MICA</b>				
423		1/8W	120 Ω	304		50WV		10PF	
418		1/8W	220 Ω	302		50WV		100PF	
408		1/8W	270 Ω	303		50WV		200PF	
407		1/8W	330 Ω		<b>CERAMIC DISC</b>				
405		1/8W	470 Ω	301		50WV		33PF (NPO)	
404, 406, 409, 410, 413~415		1/8W	510 Ω	305, 306		50WV		0.047 μF	
417, 419, 420									
421		1/8W	910 Ω	<b>TC TRIMMER CAPACITOR</b>					
416		1/8W	1K Ω	301		TSN-P-100DS		20PF	
412		1/8W	2.2K Ω						
411		1/8W	2.7K Ω						
402		1/8W	47K Ω						
403		1/8W	2.7M Ω						
<b>TH</b>	<b>THRMISTOR</b>			<b>PB</b>	<b>PRINTED CIRCUIT BOARD</b>				
401			D-22A					1562 (A~Z)	
<b>VR</b>	<b>POTENTIOMETER</b>								
401		PN822H501H	470 Ω	<b>Q</b>	<b>IC</b>				
402		PN822H102H	1K Ω	501				SN7490AN	
<b>C</b>	<b>CAPACITOR</b>								
	<b>CERAMIC DISC</b>			<b>X</b>	<b>TCXO</b>				
402, 412, 414, 420		50WV	0.001 μF	501				TCO6SJ10	
403, 416, 425		50WV	0.01 μF						
	<b>CERAMIC CHIP</b>			<b>C</b>	<b>CAPACITOR</b>				
406~411		25WV	0.001 μF		<b>CERAMIC DISC</b>				
427		25WV	0.01 μF	501		50WV		0.047 μF	
	<b>CERAMIC FEED THRU</b>								
421~423		50WV	0.001 μF						
	<b>TANTALUM</b>								
417, 418		35WV	0.1 μF						
419		35WV	6.8 μF						
404, 405, 413, 415, 424, 426		35WV	10 μF						
	<b>MYLAR</b>								
401		100WV	0.47 μF	<b>Q</b>	<b>IC</b>				
<b>TC</b>	<b>TRIMMER CAPACITOR</b>			601				μPC14312	
401		ECV-12W 20×53	20PF						
<b>QS</b>	<b>IC SOCKET</b>			<b>D</b>	<b>DIODE</b>				
401			314-AG37D	601		S1RBA		100V 1A	
402			316-AG37D						
				<b>X</b>	<b>CRYSTAL OSCILLATOR</b>				
<b>PB</b>	<b>PRINTED CIRCUIT BOARD</b>			601				TCO-8D2	
1561 (A~Z)									
				<b>C</b>	<b>CAPACITOR</b>				
<b>Q</b>	<b>IC &amp; TRANSISTOR</b>				<b>TANTALUM</b>				
303		IC	SN7490AN	601		35WV		1 μF	
301, 302		Tr	2SC828Q						
				602		25WV		470 μF	
<b>X</b>	<b>CRYSTAL</b>								
301		HC-6/U	10MHz						

